



CONTACT US IN TAIWAN

臺灣艾可帥特緊固件有限公司
TAIWAN EXACT FASTENERS CO.,LTD.

820 高雄市岡山區大新街85號
No.85,Daxin st., Gangshan Dist.,Kaohsiung City,Taiwan,R.O.C.
統編：42676693 Pots Code:82050
Tel:886-7-6217757 Fax:886-7-6218881
Email:vanessa@exact-tw.com
www.exactfast.com

CONTACT US IN CHINA MAINLAND

寧波艾可帥特緊固件有限公司
NINGBO EXACT FASTENERS CO.,LTD.


浙江寧波杭州灣新區熱電路77號
No.77,Re Dian Road, Hangzhou Bay New District, Ningbo, Zhejiang
Office: Room 422, Duoyuanchuangye Building B, No.188 Donghanmen
South Road, Yuyao, Zhejiang
Tel: +86-574-22229817 Fax: +86-574-22229816
Email: zjf@exact-cn.com
www.exactfast.com



Welcome to

exact[®]

臺灣艾可帥特緊固件有限公司
TAIWAN EXACT FASTENERS CO.,LTD.

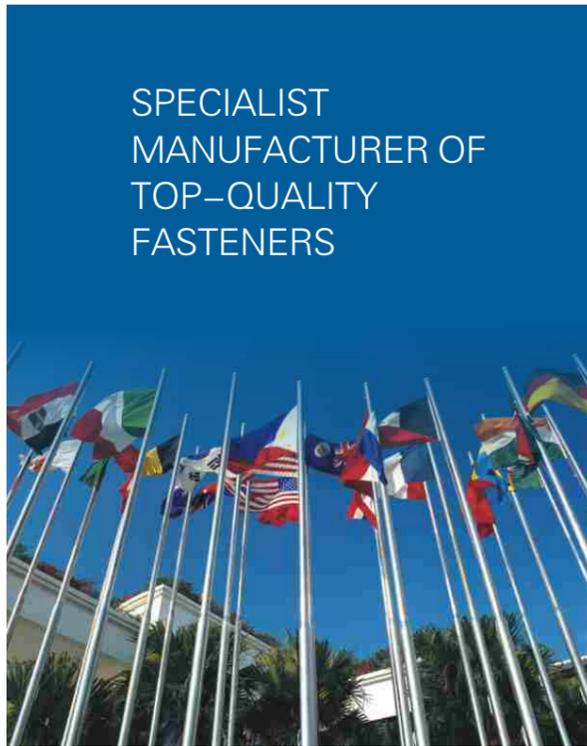

EXACT INTRODUCTION

Ningbo EXACT Fasteners Co.,Ltd. was Established in 2000 and has been professional manufacturer and trader with turnover USD:30 million by 2017.

Taiwan EXACT Fasteners Co., Ltd. in Gangshan Kaohsiung since 2014.

Joint venture factory: Quzhou Tianli Fasteners Co.,Ltd. in Qu-zhou Zhejiang China.

Accredited with CE certificates and ISO 9001, EXACT has received the international recognition of social responsibility, anti-terrorism control, fire system and quality inspection system. With set up of Taiwan and China productions, EXACT is your right choice to provide you with best service and solution for your market.



Exact Production Plant – Screw Manufacture

- ▶ Kangshan, Kaohsiung, Taiwan
- ▶ Yuyao, Zhejiang, China



Factory Profile

Factory Area (sq meter):	4000
Total workers:	27
No. Business Personnel:	7
Number of production lines:	17
Number of quality assurance	3

Product Range&Sub-categories

monthly total productioncapacity	400 MTS
self production capacity	200 MTS
outsource capacity	200 MTS

MAIN PRODUCTS

- CHIPBOARD SCREW(6 LOBE, POZIDRIVE)
- DRYWALL SCREW(DECK SCREW)
- SELF-DRILLING SCREW
- SELF-TAPPING SCREW
- MACHINE SCREW
- WINDOW SCREW
- ROOFING SCREW
- THREAD ROLLING SCREW
- PARTICLE BOARD SCREW

PRODUCTS RANGE

STANDARD:

ANSI,BS,DIN,ISO,JIS,AS OR DRAWING.

CAPACITY:

3000-4000 METRIC TONS PER MONTH.

SCREW DIAMETER RANGE:

#0-3/4"(2MM-20MM).

SCREW LENGTH RANGE:

1/8"-24"(3MM-600MM).

MATERIALS:

MILD STEEL,AISI,C1001T,C1006,C1008,C1010,C1018,C1022,C1035,SCM435.

STAINLESS STEEL,302HQ,304M,305JI,316C,T410,T430,SOLID BRASS,

SOLID ALUMINUM.

SURFACE FINISH:


ZINC PLATED CR6+ /CR3+(WHITE, YELLOW OR BLACK),

BLACK/GREY PHOSPHATED, RUSPERT,


MECHANICAL GALVANIZED, DACROMET, NICKLE PLATED,

BRASS PLATED,PLAIN ETC.

Screw Threads And Points

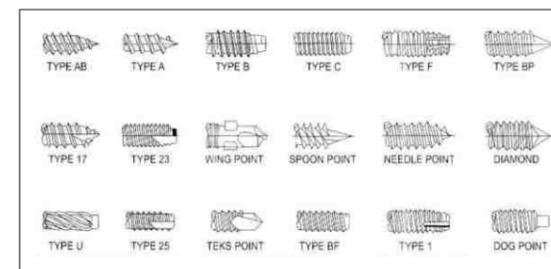

Head Styles Of Screws

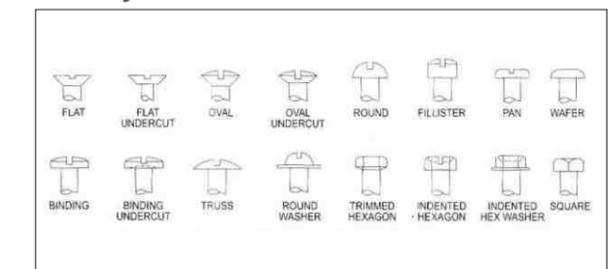

DRYWALL SCREWS

Known as a multipurpose screw used in a variety of applications.

Coarse Thread, for drywall to wood studs and attaching fixtures to either material,

Fine Thread, for drywall to 20-25 gauge metal studs,

Yellow zinc plating used for aesthetics and in low corrosion resistant applications-salt spray rating is 90 hours.

Recommended drive speed of 2,500 rpm.



PHILLIPS BUGLE DRYWALL SCREW			
SIZE	PHIL DRIVE SIZE	QTY / CTN	WT / CTN
6x 3/4	# 2	10M	24
6x 1	# 2	10M	30
6x 1-1/8	# 2	10M	34
6x 1-1/4	# 2	8M	29
6x 1-1/2	# 2	6M	25
6x 1-5/8	# 2	5M	23
6x 1-3/4	# 2	4M	20
6x 2	# 2	3.5M	20
6x 2-1/4	# 2	3M	20
7x 1-1/2	# 2	5M	25
7x 2	# 2	3M	20
7x 2-1/2	# 2	2.5M	21
8x 3/4	# 2	10M	30
8x 1	# 2	10M	32
8x 1-1/4	# 2	8M	32
8x 1-1/2	# 2	6M	29
8x 1-5/8	# 2	5M	28
8x 2	# 2	3M	23
8x 2-1/2	# 2	2.5M	23
8x 3	# 2	2M	23
10x 2	# 2	3M	25
10x 2-1/2	# 2	2.5M	31
10x 3	# 2	2M	30
10x 3-1/2	# 2	1M	18
10x 3-3/4	# 2	1M	19
10x 4	# 2	1M	21
10x 4-1/2	# 2	500	12
10x 5	# 2	500	13
10x 6	# 2	500	15

PHILLIPS BUGLE LAMINATING SCREW BLACK PHOSPHATE			
SIZE	DRIVE SIZE	QTY / CTN	WT / CTN
10x 1-1/2	# 2	5M	36

TRIM HEAD TWINFEST DRYWALL SCREW BLACK PHOSPHATE			
SIZE	PHIL DRIVE SIZE	QTY / CTN	WT / CTN
6x 1	# 1	10M	27
6x 1-5/8	# 1	5M	20
6x 2-1/4	# 1	3M	17
8x 3	# 2	2M	22



Used for temporary fastening dry-wall in double wall requirements.



Small flat head finishing screw for fastening base or trim through drywall to light gauge metal studs.

DECK SCREWS

*Design features illustrated on the carton

"The Best Deck Screws" on the market. Guaranteed not to rust! Will not streak or stain lumber. Used in decks, docks, fences, spas, gazebos, siding, and other outdoor applications.



SQUARE DR. FLAT DECK SCREW W/NIBS TYPE-17 PT 2/3 THREAD STAINLESS STEEL			
SIZE	DRIVE SIZE	QTY / CTN	WT / CTN
8-8x 1-1/4	#2	8M	38
8-8x 1-5/8	#2	5M	31
8-8x 2	#2	3.5M	27
9-8x 2-1/2	#2	2.5M	25
9-8x 3	#2	2M	24
10-8x 2	#2	3M	30
10-8x 2-1/2	#2	2M	26
10-8x 3	#2	1.5M	23
10-8x 3-1/2	#2	1M	18
10-8x 4	#2	1M	20



#1SQ TRIM HD NIBS C/T T-17 SS PASSIVATED		
SIZE	QTY / CTN	WT / CTN
7 x 1-5/8	5M	35
7 x 2-1/4	3M	26
7 x 3	2M	20



PH/SQUARE DR. FLAT DECK SCREWS W/NIBS & TYPE-17 2/3 T.L. CHROMIUM FREE GREEN RUSPERT 500HRS SALT SPRAY RECOMMENDED FOR ACQ			
SIZE	DRIVE SIZE	QTY/CTN	WT/CTN
8-8 x 1-1/4	#2	8M	38
8-8 x 1-5/8	#2	5M	31
8-8 x 2	#2	3.5M	27
9-8 x 2-1/2	#2	2.5M	25
9-8 x 3	#2	2M	24
10-8 x 3 1/2	#2	1M	18
10-8 x 4	#2	1M	20

PH/SQ FLAT HD NIBS TYPE-17 C/T 2/3 T.L. RUSPERT GREEN			
SIZE	DRIVE SIZE	QTY/CTN	WT/CTN
8-8 x 1-1/4	#2	8M	38
8-8 x 1-5/8	#2	5M	31
8-8 x 2	#2	3.5M	27
9-8 x 2-1/2	#2	2.5M	25
9-8 x 3	#2	2M	24
10-8 x 3-1/2	#2	1M	18
10-8 x 4	#2	1M	20



SQUARE BUGLE DRYWALL SCREW DACRO PLATED			
SIZE	SQUARE DRIVE SIZE	QTY / CTN	WT/CTN
6 x 1-5/8	#2	5M	23
6x2	#2	3.5M	20
8 x 2-1/2	#2	2.5M	24
8x3	#2	2M	22
10 x 3-1/2	#2	1M	18
10 x 4	#2	1M	21

A good exterior wood screw rated at 500 or 1000 salt spray hours, used in treated wood, patios, decks, fencing and other outdoor applications.



SQUARE BUGLE DRYWALL SCREW DACRO PLATED			
SIZE	PHIL DRIVE SIZE	QTY / CTN	WT/CTN
6x1	#2	10M	30
6 x 1-1/4	#2	8M	29
6 x1 5/8	#2	5M	23
6x2	#2	3.5M	20
6 x 2-1/4	#2	3M	19
7 x 2-1/2	#2	2.5M	21
8 x 2-1/2	#2	2.5M	24
8x3	#2	2M	22
10 x 3-1/2	#2	1M	18
10 x 3-3/4	#2	1M	19
10 x 4	#2	1M	21
10 x 4-1/2	#2	500	12
10 x5	#2	500	13
10 x6	#2	500	15

"One of the Best Deck Screws" on the market. Salt spray resistant for over 1,200+ hours and color coded for Green, Red & Tan lumber. Will not streak or stain lumber. Used in decks, docks, fences, spas, gaze bos, siding, and other outdoor applications.



SQUARE DR. FLAT DECK SCREWS W/NIBS & TYPE-17 POINT 2/3 THREAD RUSPERT COATED 1,200 HOUR + SALT SPRAY RESISTANT			
SIZE	DRIVE SIZE	QTY / CTN	WT / CTN
8-8 x 1-1/4	#2	8M	38
8-8 x 1-5/8	#2	5M	31
8-8 x 2	#2	3.5M	27
9-8 x 2-1/2	#2	2.5M	25
9-8 x 3	#2	2M	24
10-8 x 3-1/2	#2	1M	18
10-8 x 4	#2	1M	20

SELF DRILLING


#6 Metal to metal fastening, used in light-gauge sheet metal applications. Recommended drive speed of 2,500 rpm.

#8 Metal to metal fastening, used in light sheet metal and light-gauge steel framing. Very common in H.V.A.C. ductwork assembly. Recommended drive speed of 2,500 rpm.

#10 Metal to metal fastening used in medium gauge metal framing. Commonly used by metal framing and H.V.A.C. contractors and fabricators. Can attach 12-20 gauge steel. Recommended drive speed of 2,500 rpm.

#12 Metal to metal fastening, used in sheet metal to attach to purlins and channels. Can attach 12-20 gauge steel. Recommended drive speed of 2,500 rpm.

#14 Metal to metal fastening, used for heavy-gauge metal attachment. Attaches 8-18 gauge metal. Recommended drive speed of 2,500 rpm.



** "HIGH HAT" has 38% more head height, means greater tool engagement, NO SLIP OUT and increased tool life.



IND.HEX WASHER HEAD SELF DRILLING SCREWS ZINC PLATED									
SIZE	HEX DRIVE SIZE	DRILL POINT	QTY/CTN	WT/CTN	SIZE	HEX DRIVE SIZE	DRILL POINT	QTY/CTN	WT/CTN
6 x 3/8	1/4"	#2	20M	44	12 x 1-1/2	5/16"	#3	2.5M	32
6 x 1/2	1/4"	#2	15M	40	12 x 2	5/16"	#3	2M	33
6 x 3/4	1/4"	#2	10M	32	12 x 2-1/2	5/16"	#3	1M	20
6x1	1/4"	#2	10M	39	12 x 3	5/16"	#3	1M	28
8 x 1/2	1/4"	#3	10M	33	12 x 4	5/16"	#3	1M	31
8 x 5/8	1/4"	#3	10M	38	14 x 3/4	3/8"	#3	4M	46
8 x 3/4	1/4"	#3	10M	42	14 x 1	3/8"	#3	3M	42
8x1	1/4"	#3	8M	45	14 x 1-1/4	3/8"	#3	2.5M	41
8 x 1-1/4	1/4"	#3	8M	37	14 x 1-1/2	3/8"	#3	2M	37
8 x 1-1/2	1/4"	#3	5M	35	14 x 2	3/8"	#3	1M	23
8x2	1/4"	#3	3M	29	14 x 2-1/2	3/8"	#3	1M	28
10 x 1/2	5/16"	#3	8M	38	14 x 3	3/8"	#3	1M	33
10 x 5/8	5/16"	#3	8M	41	14 x 3-1/2	3/8"	#3	1M	30
10 x 3/4	5/16"	#3	8M	47	14 x 4	3/8"	#3	500	22
10 x 3/4	5/16"	#3	8M	48	14 x 4-1/2	3/8"	#3	500	24
10 x 1	5/16"	#3	5M	35	14 x 5	3/8"	#3	500	26
10 x 1-1/4	5/16"	#3	3M	25	14 x 6	3/8"	#3	500	31
10 x 1-1/2	5/16"	#3	3M	29	14 x 7	3/8"	#4	400	28
10 x 2	5/16"	#3	2M	25	14 x 8	3/8"	#4	300	24
10 x 2-1/2	5/16"	#3	1M	16	12-24 x 7/8	5/16"	#4	4M	36
10 x 3	5/16"	#3	1M	18	12-24 x 1-1/4	5/16"	#5	2M	23
12 x 3/4	5/16"	#3	5M	41	12-24 x 1-1/2	5/16"	#5	2M	25
12 x 1	5/16"	#3	4M	39	12-24 x 2	5/16"	#5	2M	33
12 x 1-1/4	5/16"	#3	3M	33	14 x 7/8	5/16"	#2	3M	35

IND.HEX WASHER HEAD SELF DRILLING SCREWS W/EPDM NEOPRENE WASHERS ASSEMBLED				
SIZE	HEX DRIVE SIZE	DRILL POINT	QTY/CTN	WT/CTN
8 x 1/2	1/4"	#3	7M	36
8 x 5/8	1/4"	#3	4M	31
8 x 3/4	1/4"	#3	4M	33
8x1	1/4"	#3	3M	33
8 x 1-1/4	1/4"	#3	3M	28
8x1-1/2	1/4"	#3	2M	31
8x2	1/4"	#3	2M	23
10 x 1/2	5/16"	#3	4M	26
10 x 5/8	5/16"	#3	4M	28
10 x 3/4	5/16"	#3	3M	31
10 x 1	5/16"	#3	3M	27
10 x 1-1/4	5/16"	#3	3M	31
10 x 1-1/2	5/16"	#3	2M	23
10 x 2	5/16"	#3	1.5M	23
10 x 2-1/2	5/16"	#3	1.5M	15
10 x 3	5/16"	#3	800	17
12 x 3/4	5/16"	#3	3M	33
12 x 1	5/16"	#3	3M	37
12 x 1-1/4	5/16"	#3	2M	28
12 x 1-1/2	5/16"	#3	2M	31
12 x 2	5/16"	#3	1.5M	20
12 x 2-1/2	5/16"	#3	1M	23
12 x 3	5/16"	#3	1M	31
12 x 4	5/16"	#3	800	27
14 x 3/4	3/8"	#3	3M	42
14 x 1	3/8"	#3	2M	33
14 x 1-1/4	3/8"	#3	1.5M	29
14 x 1-1/2	3/8"	#3	1.5M	32
14 x 2	3/8"	#3	1M	26
14 x 2-1/2	3/8"	#3	800	25
14 x 3	3/8"	#3	800	28
14 x 4	3/8"	#3	500	26
14 x 5	3/8"	#3	400	25
14 x 6	3/8"	#3	400	27
14 x 7/8	5/16"	#3	3M	39



#6 Light gauge metal fastening t0 16 gauge. Fastens electrical boxes to metal studs.

Recommended drive speed of 2,500 rpm.

#8 Light to medium gauge metal fastening t0 12 gauge. Used in stud framing applications.

Recommended drive speed of 2,500 rpm.

#10 Medium-gauge metal fastening up t0 12 gauge steel. Used by H.V.A.C. contractors and fabricators.

Recommended drive speed of 2,500 rpm.

PHILLIPS PAN HEAD SELF DRILLING SCREWS ZINC PLATED				
SIZE	PHIL DRIVE SIZE	DRILL POINT	QTY/CTN	WT/CTN
6 x 3/8	#2	#2	20M	36
6 x 1/2	#2	#2	15M	31
6 x 3/4	#2	#2	10M	27
6x1	#2	#2	10M	37
8 x 1/2	#2	#3	10M	32
8 x 5/8	#2	#3	10M	37
8 x 3/4	#2	#3	10M	41
8x1	#2	#3	8M	40
8 x 1-1/4	#2	#3	6M	47
8 x 1-1/2	#2	#3	5M	37
8x2	#2	#3	3M	29
8x3	#2	#3	2M	25
10 x 1/2	#2	#3	8M	36
10 x 5/8	#2	#3	8M	41
10 x 3/4	#2	#3	8M	46
10 x 1	#2	#3	5M	36
10 x 1-1/4	#2	#3	3M	25
10 x 1-1/2	#2	#3	3M	29
10 x 2	#2	#3	2M	24
10 x 3	#2	#3	1M	18
12 x 1	#2	#3	4M	36



Designed for medium-gauge framing of up t0 12 gauge metal stud. Square drive provides greater torque drive and resists cam-out.

Recommended drive speed of 2,500 rpm.

SQUARE PAN HEAD SELF DRILLING SCREWS ZINC PLATED				
SIZE	SQ DRIVE SIZE	DRILL POINT	QTY/CTN	WT/CTN
6 x 3/8	#1	#2	25M	45
6 x 1/2	#1	#2	25M	52
6 x 3/4	#1	#2	20M	54
6x1	#1	#2	15M	51
8 x 1/2	#2	#3	10M	32
8 x 3/4	#2	#3	10M	41
8x1	#2	#3	8M	40
8 x 1-1/4	#2	#3	8M	47
8 x 1-1/2	#2	#3	4M	27
10 x 1/2	#2	#3	8M	36
10 x 3/4	#2	#3	8M	46
10 x 1	#2	#3	5M	36
10 x 1-1/4	#2	#3	3M	24
10 x 1-1/2	#2	#3	3M	28
12 x 1/2	#2	#3	8M	46
12 x 5/8	#2	#3	7M	45
12 x 3/4	#2	#3	6M	46
12 x 1	#2	#3	5M	45



For wooden headers or planks to 8-16 gauge metal studs. Reamer wings eliminate the predrilling of wood.

Recommended drive speed of 2,500 rpm

PHILLIPS FLAT REAMER (WINGS) S/D/S W/SHANK SLOT ZINC PLATED					
SIZE	PHIL DRIVE SIZE	DRILL POINT	QTY/CTN	WT/CTN	DRILLING CAPACITY
10-24 x 1-7/16	#2	#3	3M	28	5/8" & 7/8" Wood To .175 Metal
10-16 x 1-5/8	#2	#3	4M	31	7/8" Wood To .175 Metal
12-24 x 2	#2	#3	2M	32	1-1/8" Wood To .210 Metal
12-24 x 2-1/4	#2	#3	2M	39	1-1/4" Wood To .210 Metal
12-24 x 2-1/2	#2	#3	1.5M	32	1-1/2" Wood To .210 Metal
1/4-20 x 2-3/4	#2	#3	1M	35	2" Wood To .250 Metal
1/4-20 x 3-1/4	#2	#3	1M	35	2-1/4" Wood To .250 Metal
1/4-20 x 3-3/4	#2	#3	500	27	2-1/2" Wood To .250 Metal



Designed for plywood to light-gauge metal fastening.

Recommended drive speed of 2,500 rpm

PHILLIPS WAFER SELF DRILLING SCREWS ZINC PLATED					
SIZE	PHIL DRIVE SIZE	DRILL POINT	QTY/CTN	WT/CTN	DRILLING CAPACITY
8-18 x 1-1/4	#2	#3	5M	40	1/2" plywood to .175 Metal
10-16 x 3/4	#2	#3	10M	51	1/4" plywood to .175 Metal
10-24 x 3/4	#2	#3	10M	51	1/4" plywood to .175 Metal
10-16 x 1	#2	#3	5M	34	1/4" plywood to .175 Metal
10-24 x 1	#2	#3	5M	34	3/8" plywood to .175 Metal
10-24 x 1-1/4	#2	#3	4M	34	1/2" plywood to .175 Metal
10-16 x 1-1/2	#2	#3	3M	27	1/2" plywood to .175 Metal
10-24 x 1-1/2	#2	#3	3M	27	1/2" plywood to .175 Metal



Designed for a finish screw application of baseboard or trim through drywall to medium gauge 18-25 gauge metal studs.

Recommended drive speed of 2,500 rpm

SO. DRIVE TRIM HEAD SELF DRILLING DRYWALL SCREW				
SIZE	SQUARE DRIVE SIZE	DRILL POINT	QTY CTN	WT CTN
6x1	#1	#2	10M	29
6 x 1-5/8	#1	#2	5M	23
6 x 2-1/4	#1	#2	3M	19
8x3	#2	#2	2M	24

NEOPRENE WASHERS, STEEL BACK GALVANIZED



EPDM NEOPRENE WASHERS STEEL BACKED GALVANIZED			
SIZE	O.D.	QTY/CTN	WT/CTN
8 x 1/2	12MM	20M	49
8 x 9/16	14MM	15M	44
8 x 5/8	16MM	12M	40
10 x 1/2	12MM	20M	49
10 x 9/16	14MM	15M	44
10 x 5/8	16MM	12M	40
12 x 9/16	14MM	15M	44
12 x 5/8	16MM	12M	40
14 x 9/16	14MM	15M	44
14 x 5/8	16MM	12M	40



ZINC

BLACK

Designed for drywall to metal fastening in light to medium gauge steel.

Recommended drive speed of 2,500 rpm.

PHILLIPS MODIFIED TRUSS (K-LATH) SELF DRILLING SCREW				
SIZE	PHIL DRIVE SIZE	DRILL POINT	QTY/CTN	WT/CTN
8 x 1/2	#2	#3	10M	36
8 x 9/16	#2	#3	10M	41
8 x 3/4	#2	#3	10M	48
8x1	#2	#3	8M	43
8 x 1-1/4	#2	#3	7M	47
8 x 1-1/2	#2	#3	6M	46
8 x 1-5/8	#2	#3	5M	44
8 x 1-7/8	#2	#3	3M	40
8x2	#2	#3	3M	40
8 x 2-1/2	#2	#3	2.5M	40
8x3	#2	#3	2M	40
10 x 3/4	#2	#3	8M	47



BLACK

ZINC

Designed for metal lath to heavy 12-20 gauge metal studs. Our screws have a #3 drilling point for heavy gauge.

Recommended drive speed of 2,500 rpm.

PHILLIPS BUGLE DRYWALL SELF DRILLING SCREWS				
SIZE	PHIL DRIVE SIZE	DRILL POINT	QTY/CTN	WT/CTN
6x1	#2	#2	10M	34
6 x 1-1/8	#2	#2	10M	38
6 x 1-1/4	#2	#2	8M	32
6 x 1-5/8	#2	#2	5M	25
6 x 1-7/8	#2	#2	4M	23
6x2	#2	#2	3.5M	22
8 x 2-3/8	#2	#2	2.5M	24
8 x 2-5/8	#2	#2	2.5M	25
8x3	#2	#2	2M	24
10 x 3-1/2	#2	#2	1M	20
10 x 4	#2	#2	1M	21



BLACK



ZINC

PHILLIPS PAN FRAMING SELF DRILLING SCREW SERR.

Designed for various clip screw applications and installations requiring low profile head configurations.

PHILLIPS PAN FRAMING SELF DRILLING SCREW			
SIZE	PHIL DRIVE SIZE	QTY/CTN	WT/CTN
6 x 7/16	#2	10M	26
7 x 7/16	#2	10M	27

Recommended drive speed of 2,500 rpm.



PHILLIPS OVAL HEAD SELF DRILLING SCREWS

Designed for light-medium gauge framing of up to 14 gauge steel. Can accommodate a finishing washer for a nice appearance.

PHILLIPS OVAL HEAD SELF DRILLING SCREWS ZINC PLATED				
SIZE	PHIL DRIVE SIZE	DRILL POINT	QTY/CTN	WT/CTN
8 x 3/4	#2	#3	10M	39
8x1	#2	#3	8M	39
8 x 1-1/4	#2	#3	5M	29
10 x 1	#2	#3	5M	34
10 x 1-1/4	#2	#3	3M	25

Recommended drive speed of 2,500 rpm.



PHILLIPS PANCAKE FRAMING SELF DRILLING SCREWS

Designed for medium gauge stud track framing to 18-20 gauge metal.

PHILLIPS PANCAKE FRAMING SELF DRILLING SCREWS				
SIZE	PHIL DRIVE SIZE	DRILL POINT	QTY/CTN	WT/CTN
10 x 5/8	#2	#3	7.5M	38
10 x 1	#2	#3	5M	36
12 x 3/4	#2	#3	5M	43

Recommended drive speed of 2,500 rpm.



Designed for light-medium gauge framing of up to 14 gauge steel.

Recommended drive speed of 2,500 rpm.

PHILLIPS FLAT SELF DRILLING SCREWS ZINC PLATED				
SIZE	PHIL DRIVE SIZE	DRILL POINT	QTY/CTN	WT/CTN
6 x 1/2	#2	#2	15M	31
6 x 3/4	#2	#2	10M	27
6x1	#2	#2	10M	37
6 x 1-1/2	#2	#2	8M	32
8 x 1/2	#2	#2	10M	32
8 x 5/8	#2	#3	10M	37
8 x 3/4	#2	#3	10M	41
8x1	#2	#3	8M	40
8 x 1-1/4	#2	#3	8M	47
8 x 1-1/2	#2	#3	5M	37
8x2	#2	#3	3M	26
10 x 1/2	#2	#3	8M	36
10 x 5/8	#2	#3	8M	41
10 x 3/4	#2	#3	8M	46
10x1	#2	#3	5M	36
10 x 1-1/4	#2	#3	5M	25
10 x 1-1/2	#2	#3	4M	29
10 x 2	#2	#3	3M	24
10 x 2-1/2	#2	#3	2.5M	23
10 x 3	#2	#3	2M	16
12 x 3	#3	#3	1M	23
14 x 1-1/2	#3	#3	2M	30
14 x 2	#3	#3	1.5M	28
14 x 3	#3	#3	1M	19
14 x 4	#3	#3	500	19
14 x 5	#3	#3	500	23

WOOD WORKING



ZINC

BLACK

PHILLIPS FLAT PARTICLE BOARD SCREW W/NIBS 2/3RD THREAD			
SIZE	PHIL DRIVE SIZE	QTY/CTN	WT/CTN
8-11 x 3/4	#2	10M	35
8-11 x 1	#2	10M	37
8-11 x 1-1/8	#2	9M	37
8-11 x 1-1/4	#2	8M	38
8-11 x 1-1/2	#2	6M	28
8-11 x 1-5/8	#2	5M	31
8-11 x 1-3/4	#2	4M	24
8-11 x 2	#2	3.5M	27
9-10 x 2-1/2	#2	2.5M	25
9-10 x 3	#2	2M	24



PH/SQ FLAT HD C/T T-17 W/ NIBS 2/3 T.L. ZINC			
SIZE	PHIL DRIVE SIZE	QTY/CTN	WT/CTN
8-8 x 1	#2	10M	33
8-8 x 1-1/4	#2	8M	38
8-8 x 1-1/2	#2	6M	30
8-8 x 1-5/8	#2	5M	29
8-8 x 2	#2	3.5M	24
9-8 x 2-1/2	#2	2.5M	24
9-8 x 3	#2	2M	22



PHILLIPS FLAT PARTICLE BOARD SCREW T-17 W/ NIBS 2/3 T.L. ZINC			
SIZE	PHIL DRIVE SIZE	QTY/CTN	WT/CTN
8-11 x 1	#2	10M	33
8-11 x 1-1/4	#2	8M	38
8-11 x 1-1/2	#2	6M	32
8-11 x 1-5/8	#2	5M	29
8-11 x 2	#2	3.5M	24
9-10 x 2-1/2	#2	2.5M	24
9-10 x 3	#2	2M	22



SO FLAT HD C/T T-17 W/ NIBS 2/3 THREAD BLACK			
SIZE	SQ DRIVE SIZE	QTY/CTN	WT/CTN
8-8 x 3/4	#2	10M	35
8-8 x 1	#2	10M	37
8-8 x 1-1/4	#2	8M	38
8-8 x 1-1/2	#2	6M	28
8-8 x 1-5/8	#2	5M	31
8-8 x 1-3/4	#2	4M	24
8-8 x 2	#2	3.5M	27
9-8 x 2-1/2	#2	2.5M	25
9-8 x 3	#2	2M	24

PH FLAT HD C/T T-17 W/NIBS 2/3 THREAD ZINC		
SIZE	QTY/CTN	WT/CTN
8-8 x 1	10M	37
8-8 x 1-3/4	4M	24



SQUARE

SQUARE

SQUARE

PHILLIPS

FACE FRAME SCREW, PAN HEAD TYPE-17 POINT, 2/3RD THREAD BLACK OXIDE			
SIZE	T.L.	QTY/CTN	WT/CTN
6-18 x 1-1/4	5/8"	10M	40
6-18 x 1-1/2	3/4"	8M	46
6-9 x 1-1/4	3/4"	10M	40
6-9 x 1-1/2	3/4"	8M	46
6-18 x 1-1/4	3/4"	10M	40
6-18 x 1-1/2	7/8"	8M	46



Designed for installation of hinges, slides and mounting plates to cabinets and wood-working applications. Flat head for a flush fit on surface.

PHILLIPS FLAT HINGE SCREW TWINFAST			
SIZE	PHIL DRIVE SIZE	QTY/CTN	WT/CTN
5-20 x 1/2	#2	25M	35
5-20 x 5/8	#2	25M	43
5-20 x 3/4	#2	25M	46
6-18 x 1/2	#2	25M	43
6-18 x 5/8	#2	25M	51
6-18 x 3/4	#2	25M	58



PHILLIPS FLAT HINGE SCREW COARSE THREAD			
SIZE	PHIL DRIVE SIZE	QTY/CTN	WT/CTN
5-12 x 1/2	#2	25M	35
5-12 x 5/8	#2	25M	43
5-12 x 3/4	#2	25M	46
6-12 x 1/2	#2	25M	43
6-12 x 5/8	#2	25M	51
6-12 x 3/4	#2	25M	58



Designed for installation of hinges with the beauty of an oval head. Can accommodate a finishing washer for a nice appearance.

PHILLIPS OVAL HINGE SCREW TWINFAST			
SIZE	PHIL DRIVE SIZE	QTY/CTN	WT/CTN
5-20 x 5/8	#2	25M	50
6-18 x 5/8	#2	25M	58




PHILLIPS OVAL HINGE SCREW TWINFAST			
SIZE	PHIL DRIVE SIZE	QTY/CTN	WT/CTN
6 X 5/8	#2	25M	58

SHEET METAL



A multi-purpose sheet metal screw for H.V.A.C. and other thin-gauge metal framing. Undercut beneath the head allows for more positive fastening. Twin-fast threads provide FAST, superior penetration without walking. This screw is built for STRENGTH and SPEED.

Recommended drive speed of 2,500 rpm.



*** Interfast Group's own "HIGH HAT" designed in the field for the professional sheet metal installer, has 38% more head height, means greater tool engagement, NO SLIP OUT and increased tool life.

Once you try them you'll never install without them.

HEX WASHER HEAD SLOTTED TWINFAST S/M/S Z/P

SIZE	HEX DRIVE SIZE	QTY/CTN	WT/CTN
6 x 3/8	1/4"	20M	42
7 x 1/2	1/4"	15M	42
7 x 9/16	1/4"	16M	44
8 x 1/2	1/4"	15M	44
8 x 9/16	1/4"	10M	32
8 x 5/8	1/4"	10M	34
8 x 3/4	1/4"	10M	39
8x1	1/4"	8M	39
8 x 1-1/4	1/4"	5M	29
8 x 1-1/2	1/4"	5M	34
8x2	1/4"	3M	26
8 x 1/2...	1/4"	15M	47
10 x 1/2...	1/4"	10M	46
10 x 3/4...	1/4"	9M	46
10 x 1...	1/4"	6M	42
10 x 1-1/4...	1/4"	4M	35
10 x 1-1/2...	1/4"	4M	38
10 x 2...	1/4"	2M	23
10 x 1/2	5/16"	10M	43
10 x 3/4	5/16"	8M	46
10 x 1	5/16"	6M	40
10 x 1-1/4	5/16"	3M	24
10 x 1-1/2	5/16"	3M	29
10 x 2	5/16"	2M	23

SLOT IHWH T/F ZP W/EPDM BONDED WASHER .

SIZE	HEX DRIVE SIZE	QTY/CTN	WT/CTN
8x1	1/4"	7M	36
8 x 1-1/2	1/4"	4M	33
8x2	1/4"	2.5M	27



BLACK

Designed for light gauge stud track framing up to 20 gauge metal. Twin-fast sharp point provides FAST, superior penetration.

Recommended drive speed of 2,500 rpm.

PHILLIPS PAN FRAMING TWINFAST SCREW

SIZE	PHIL DRIVE SIZE	QTY/CTN	WT/CTN
6 x 7/16	#2	10M	24
7 x 7/16	#2	10M	27



Designed for Metal to Wood fastening. With 1000hrs silver ruspert plating for corrosion resistance. Twin-fast sharp point provides FAST, superior penetration. Neoprene washer creates a leak proof seal.


Recommended drive speed of 2,500 rpm.

IND. HEX WASHER "HIGH HAT" HEAD TWINFAST FILLET-UNDER HEAD SILVER RUSPERT 1000HRS

SIZE	HEX DRIVE SIZE	WT CTN	QTY CTN	W/WASHER CRTN QNTY
9-15 x1	1/4"	41	7M	5M
9-15 x1-1/2	1/4"	32	4M	3.5M
9-15 x 2	1/4"	27	3M	2.5M
9-15 x 2-1/2	1/4"	19	1.5M	1.5M
9-15 x 3	1/4"	23	1.5M	1.5M



ZINC



BLACK

Designed for stud-framing and attaching studs to track of 20 gauge metal. Twin-fast sharp point provides FAST superior penetration.

Recommended drive speed of 2,500 rpm.

PHILLIPS ~MODIFIED TRUSS (K-LATH) TWINFAST S/M/S

SIZE	PHIL DRIVE SIZE	QTY/CTN	WT/CTN
8 x 1/2	#2	10M	36
8 x 9/16	#2	10M	38
8 x 3/4	#2	10M	46
8x1	#2	8M	32
8 x 1-1/4	#2	5M	32
8 x 1-1/2	#2	5M	38
8 x 1-5/8	#2	5M	39
8 x 1-7/8	#2	3M	36
8x2	#2	3M	3M
8 x 2-1/2	#2	2.5M	2.5M
8x3	#2	2M	2M



PHILLIPS PAN HEAD SHEET METAL SCREWS Z/P

SIZE	QTY/CTN	WT/CTN
6 x 3/8	20M	34
6 x 1/2	20M	43
6 x 5/8	18M	43
6 x 3/4	16M	46
6x1	10M	36
6 x 1-1/4	8M	34
6 x 1-1/2	7M	35
6x2	4M	23
8 x 1/4	25M	50
8 x 3/8	18M	50
8 x 1/2	14M	44
8 x 5/8	12M	44
8 x 3/4	12M	50
8x1	8M	40
8 x 1-1/4	6M	38
8 x 1-1/2	6M	41
8 x 1-3/4	4M	30
8x2	3M	27
8 x 2-1/2	2.5M	28
8x3	2M	23
10 x 3/8	14M	27
10 x 1/2	10M	60
10 x 5/8	8M	46
10 x 3/4	8M	43
10 x 1	6M	46
10 x 1-1/4	5M	41
10 x 1-1/2	4M	42
10 x 1-3/4	4M	38
10 x 2	3M	43
10 x 2-1/2	1.5M	35
10 x 3	1.5M	22
12 x 1/2	8M	25
12 x 5/8	7M	52
12 x 3/4	6M	51
12 x 1	6M	49
12 x 1-1/4	4M	59
12 x 1-1/2	4M	46
12 x 1-3/4	3M	52
12 x 2	2M	44
12 x 2-1/2	1.5M	32
12 x 3	1M	30
14 x 1/2	5M	23
14 x 5/8	4.5M	65
14 x 3/4	4M	60
14 x 1	3M	44
14 x 1-1/4	3M	40
14 x 1-1/2	2.5M	45
14 x 1-3/4	2.25M	45
14 x 2	2M	44
14 x 2-1/2	1.5M	40
14 x 3	1M	31
14 x 3-1/2	1M	36
14 x 4	800	33



PHILLIPS TRUSS HD SMS ZP

SIZE	DRIVE SIZE	THREAD TYPE	QTY/CTN
6-18 x1	2	A	10M
6-18 x 1-1/4	2	A	10M
8-18 x 1/2	2	AB	14M
8-18 x 5/8	2	AB	12M
8-18 x 3/4	2	AB	12M
8-15 x1	2	A	8M
8-15 x 1-1/4	2	A	6M
8-15 x 1-1/2	2	A	6M
10-16 x 1/2	2	AB	10M
10-16 x 3/4	2	AB	8M
10-12 x 1	2	A	6M
10-12 x 1-1/4	2	A	5M



SQUARE DRIVE PAN HD SMS ZP

SIZE	DRIVE SIZE	THREAD TYPE	QTY/CTN
6-20 x 3/8	1	AB	20M
6-20 x 1/2	1	AB	20M
6-20 x 5/8	1	AB	18M
6-20 x 3/4	1	AB	16M
6-18 x 1	1	A	10M
6-18 x 1-1/2	1	A	7M
8-18 x 3/8	2	AB	18M
8-18 x 1/2	2	AB	14M
8-18 x 5/8	2	AB	12M
8-18 x 3/4	2	AB	12M
8x1	2	A	8M
8-15 x 1-1/4	2	A	7M
8-15 x 1-1/2	2	A	6M
8-15 x 2	2	A	3M
10-16 x 1/2	2	AB	10M
10-16 x 5/8	2	AB	8M
10-16 x 3/4	2	AB	8M
10-12 x 1	2	A	6M
10-12 x 1-1/4	2	A	5M
10-12 x 1-1/2	2	A	4M
10-12 x 2	2	A	3M
12-14 x 3/4	3	AB	6M
12-11 x 1	3	A	6M
12-11 x 1-1/4	3	A	4M
12-11 x 1-1/2	3	A	4M
12-11 x 2	3	A	2M
14-14 x 1/2	3	AB	5M
14-14 x 3/4	3	AB	4M
14-14 x 1	3	A	3M
14-10 x 1-1/2	3	A	2.5M
14-10 x 2	3	A	2M



PHILLIPS OVAL HD SMS ZP

SIZE	DRIVE SIZE	THREAD TYPE	QTY/CTN
6-20 x 1/2	2	AB	20M
6-20 x 5/8	2	AB	18M
6-20 x 3/4	2	AB	16M
6-18 x1	2	A	10M
6-18 x 1-1/4	2	A	8M
6-18 x 1-1/2	2	A	7M
8-18 x 1/2	2	AB	14M
8-18 x 5/8	2	AB	12M
8-18 x 3/4	2	AB	12M
8-15 x1	2	A	8M
8-15 x 1-1/4	2	A	6M
8-15 x 1-1/2	2	A	6M
8-15 x 2	2	A	3M
10-16 x 5/8	2	AB	8M
10-16 x 3/4	2	AB	8M
10-12 x 1	2	A	6M
10-12 x 1-1/4	2	A	5M
10-12 x 1-1/2	2	A	4M
10-12 x 2	2	A	3M
12-14 x 3/4	3	AB	6M
12-11 x 1	3	A	6M
12-11 x 1-1/4	3	A	4M
12-11 x 1-1/2	3	A	4M
12-11 x 2	3	A	2M
14-10 x 1	3	A	2.5M
14-10 x 1-1/2	3	A	2.5M
14-10 x 2	3	A	2M

PHILLIPS PAN TY-A BLACK

SIZE	PHILL DRIVE	QTY/CTN	THREAD TYPE
8-15 x 1/2	2	10M	A
8-15 x 5/8	2	10M	A
8-15 x 3/4	2	8M	A
8-15 x1	2	8M	A
8-15 x 1-1/2	2	6M	A

CEMENT BOARD



Designed for fastening fiber cement board to wood. Applications include, lap siding, fiber cement roofing trim & flooring tile in kitchen & bath.

Recommended drive speed of 2,500 rpm.

PHILLIPS WAFER CEMENT BOARD SCREWS HI-LO THREAD SHARP POINT W/8 NIBS CERAMIC COATED GRAY

SIZE	PHIL DRIVE SIZE	QTY/CTN	WT/CTN
8-8 x 1-1/4	#2	5M	31
8-8 x 1-5/8	#2	4M	31
8-8 x 2-1/4	#2	3M	35



Designed for fastening fiber cement board to wood. Applications include, lap siding, fiber cement roofing trim & flooring tile in kitchen & bath.

Recommended drive speed of 2,500 rpm.

PHILLIPS WAFER CEMENT BOARD SCREWS HI-LO THREAD SPOON POINT W/8 NIBS CERAMIC COATED GRAY

SIZE	PHIL DRIVE SIZE	QTY/CTN	WT/CTN
8-8 x 1-1/4	#2	5M	30
8-8 x 1-5/8	#2	4M	30
8-8 x 2-1/4	#2	3M	35



Designed for fastening fiber cement board to 16-20 gauge metal studs. Applications include, lap siding, fiber cement roofing trim & flooring tile in kitchen & bath.

Recommended drive speed of 2,500 rpm.

PHILLIPS WAFER CEMENT BOARD S/D/S #3 PT. W/8 NIBS CERAMIC COATED GRAY

SIZE	PHIL DRIVE SIZE	QTY/CTN	WT/CTN
8-18 x 1-1/4	#2	5M	30
8-18 x 1-5/8	#2	4M	30



Designed for fastening fiber cement board to 16-20 gauge metal studs. Reamer wings allow wafer head to self counter-sink flush with fiber cement board. Applications include, lap siding, fiber cement roofing trim & flooring tile in kitchen & bath.

Recommended drive speed of 2,500 rpm.

PHILLIPS WAFER CEMENT BOARD S/D/S #3 PT W/8 NIBS & REAMER WINGS CERAMIC COATED GRAY

SIZE	PHIL DRIVE SIZE	QTY/CTN	WT/CTN
8-18 x 1-1/4	#2	5M	30
8-18 x 1-5/8	#2	4M	30
8-18 x 2-1/4	#2	3M	35

CONCRETE SCREWS



1. Drill hole approximately 1/4" deeper than the length of the concrete screw.
2. Place concrete screw into hole.
3. Using a nut driver, drive screw into hole.

SLOTTED HEX WASHER HEAD CONCRETE SCREW ANCHORS, HI-LO THREAD SHARP POINT, CERAMIC COATED BLUE

SIZE	QTY/CTN	WT/CTN	DRILL BIT SIZE	HEX DRIVE SIZE
1/4 x 1-1/4	2.5M	29	3/16 x 3-1/2	5/16"
1/4 x 1-3/4	2M	31	3/16 x 3-1/2	5/16"
1/4 x 2-1/4	1.5M	29	3/16 x 4-1/2	5/16"
1/4 x 2-3/4	1M	23	3/16 x 4-1/2	5/16"
1/4 x 3-1/4	1M	27	3/16 x 5-1/2	5/16"
1/4 x 3-3/4	800	25	3/16 x 5-1/2	5/16"
1/4 x 4	500	17	3/16 x 5-1/2	5/16"
1/4 x 5	500	22	3/16 x 5-1/2	5/16"
3/16 x 1-1/4	6M	42	5/32 x 3-1/2	1/4"
3/16 x 1-3/4	4M	39	5/32 x 3-1/2	1/4"
3/16 x 2-1/4	2.5M	30	5/32 x 4-1/2	1/4"
3/16 x 2-3/4	1.5M	21	5/32 x 4-1/2	1/4"
3/16 x 3-1/4	1.5M	25	5/32 x 5-1/2	1/4"
3/16 x 3-3/4	1M	20	5/32 x 5-1/2	1/4"
3/16 x 4	1M	20	5/32 x 5-1/2	1/4"



PHILLIPS FLAT HEAD CONCRETE SCREW ANCHORS, HI-LO THREAD SHARP POINT, CERAMIC COATED BLUE

SIZE	QTY/CTN	WT/CTN	DRILL BIT SIZE	HEX DRIVE SIZE
1/4 x 1-1/4	2.5M	29	3/16 x 3-1/2	#3
1/4 x 1-3/4	2M	32	3/16 x 3-1/2	#3
1/4 x 2-1/4	1.5M	29	3/16 x 4-1/2	#3
1/4 x 2-3/4	1M	23	3/16 x 4-1/2	#3
1/4 x 3-1/4	1M	27	3/16 x 5-1/2	#3
1/4 x 3-3/4	800	25	3/16 x 5-1/2	#3
1/4 x 4	500	16	3/16 x 5-1/2	#3
3/16 x 1-1/4	6M	41	5/32 x 3-1/2	#2
3/16 x 1-3/4	4M	36	5/32 x 3-1/2	#2
3/16 x 2-1/4	2.5M	29	5/32 x 4-1/2	#2
3/16 x 2-3/4	1.5M	27	5/32 x 4-1/2	#2
3/16 x 3-1/4	1.5M	25	5/32 x 5-1/2	#2
3/16 x 3-3/4	1M	19	5/32 x 5-1/2	#2
3/16 x 4	1M	20	5/32 x 5-1/2	#2

HEX CAP SCREW



HEX CAP SCREWS BLACK UNC

SIZE	LBS/ CTN	PCS/ CTN
1-1/8"-7 x 3		45
1-1/8"-7 x 3-1/2		40
1-1/8"-7 x 4		35
1-1/8"-7 x 4-1/2		30
1-1/8"-7 x 5		30
1-1/8"-7 x 5-1/2		30
1-1/8"-7 x 6		25
1-1/8"-7 x 6-1/2		25
1-1/4"-7 x 4		25
1-1/4"-7 x 4-1/2		25
1-1/4"-7 x 5		25
1-1/4"-7 x 5-1/2		20
1-1/4"-7 x 6		20
1-1/4"-7 x 6-1/2		20



HEX CAP SCREW UNC

SIZE	LBS/ CTN	PCS/ CTN
1/4-20 x 1/2		4000
1/4-20 x 3/4		3500
1/4-20 x 1		3000
1/4-20 x 1-1/4		2500
1/4-20 x 1-1/2		2500
1/4-20 x 1-3/4		1500
1/4-20 x 2		1400
1/4-20 x 2-1/4		1200
1/4-20 x 2-1/2		1100
1/4-20 x 3		900
1/4-20 x 3-1/2		850
1/4-20 x 4-1/2		750
1/4-20 x 4-1/2		700
1/4-20 x 5		600
1/4-20 x 5-1/2		550
1/4-20 x 6		500
5/16-18 x 1/2		2500
5/16-18 x 3/4		2200
5/16-18 x 1		1800
5/16-18 x 1-1/4		1500
5/16-18 x 1-1/2		1300
5/16-18 x 1-3/4		1100
5/16-18 x 2		850
5/16-18 x 2-1/4		800
5/16-18 x 2-1/2		700
5/16-18 x 2-3/4		650

SIZE	LBS/ CTN	PCS/ CTN
5/16-18 x 3		600
5/16-18 x 3-1/2		550
5/16-18 x 4		450
5/16-18 x 4-1/2		400
5/16-18 x 5		380
5/16-18 x 5-1/2		350
5/16-18 x 6		300
3/8-16 x 1/2		1800
3/8-16 x 3/4		1500
3/8-16 x 1		1200
3/8-16 x 1-1/4		1000
3/8-16 x 1-1/2		900
3/8-16 x 1-3/4		650
3/8-16 x 2		600
3/8-16 x 2-1/4		550
3/8-16 x 2-1/2		500
3/8-16 x 2-3/4		450
3/8-16 x 3		400
3/8-16 x 3-1/2		350
3/8-16 x 4		300
3/8-16 x 4-1/2		280
3/8-16 x 5		260
3/8-16 x 5-1/2		240
3/8-16 x 6		210
7/16-14 x 3/4		1000
7/16-14 x 1		900
7/16-14 x 1-1/4		750
7/16-14 x 1-1/2		650
7/16-14 x 1-3/4		550
7/16-14 x 2		500
7/16-14 x 2-1/2		400
7/16-14 x 3		340
7/16-14 x 3-1/2		300
7/16-14 x 4		260
7/16-14 x 4-1/2		230
7/16-14 x 5		210
7/16-14 x 5-1/2		180
7/16-14 x 6		180
1/2-13 x 3/4		600
1/2-13 x 1		550
1/2-13 x 1-1/4		500
1/2-13 x 1-1/2		450
1/2-13 x 1-3/4		400
1/2-13 x 2		350
1/2-13 x 2-1/4		300
1/2-13 x 2-1/2		300
1/2-13 x 2-3/4		260
1/2-13 x 3		240
1/2-13 x 3-1/2		210
1/2-13 x 4		200
1/2-13 x 4-1/2		170
1/2-13 x 5		180
1/2-13 x 5-1/2		140
1/2-13 x 6		130
1/2-13 x 6-1/2		120
1/2-13 x 7		110
1/2-13 x 7-1/2		120
1/2-13 x 8		100
1/2-13 x 9		90
1/2-13 x 10		55
9/16-12 x 1		450
9/16-12 x 1-1/4		400
9/16-12 x 1-1/2		350
9/16-12 x 1-3/4		300
9/16-12 x 2		280
9/16-12 x 2-1/4		250
9/16-12 x 2-1/2		220
9/16-12 x 3		200
9/16-12 x 3-1/2		180
9/16-12 x 4		160
9/16-12 x 4-1/2		150
9/16-12 x 5		120
9/16-12 x 5-1/2		120
9/16-12 x 6		110
5/8-11 x 1		350
5/8-11 x 1-1/2		280
5/8-11 x 1-3/4		250
5/8-11 x 2		230
5/8-11 x 2-1/4		210

SIZE	LBS/ CTN	PCS/ CTN
5/8-11 x 2-1/2		180
5/8-11 x 3		150
5/8-11 x 3-1/2		130
5/8-11 x 4		120
5/8-11 x 4-1/2		110
5/8-11 x 5		100
5/8-11 x 5-1/2		90
5/8-11 x 6		85
5/8-11 x 7		75
5/8-11 x 8		65
5/8-11 x 9		55
5/8-11 x 10		35
3/4-10 x 1		200
3/4-10 x 1-1/2		160
3/4-10 x 2		150
3/4-10 x 2-1/2		120
3/4-10 x 3		100
3/4-10 x 3-1/2		90
3/4-10 x 4		80
3/4-10 x 4-1/2		70
3/4-10 x 5		65
3/4-10 x 5-1/2		60
3/4-10 x 6		55
3/4-10 x 6-1/2		50
3/4-10 x 7		50
3/4-10 x 7-1/2		45
3/4-10 x 8		45
3/4-10 x 8-1/2		40
3/4-10 x 10		25
3/4-10 x 12		20
7/8-9 x 1-1/2		120
7/8-9 x 1-3/4		110
7/8-9 x 2		100
7/8-9 x 2-1/2		80
7/8-9 x 3		70
7/8-9 x 3-1/2		65
7/8-9 x 4		55
7/8-9 x 4-1/2		55
7/8-9 x 5		50
7/8-9 x 5-1/2		45
7/8-9 x 6		40
7/8-9 x 6-1/2		35
7/8-9 x 7		35
7/8-9 x 7-1/2		35
7/8-9 x 8		30
7/8-9 x 9		30
1"-8 x 2		70
1"-8 x 2-1/2		60
1"-8 x 3		50
1"-8 x 3-1/2		45
1"-8 x 4		45
1"-8 x 4-1/2		40
1"-8 x 5		35
1"-8 x 5-1/2		35
1"-8 x 6		30
1"-8 x 7		25
1"-8 x 8		20
1"-8 x 8-1/2		20
1"-8 x 9		20
1"-8 x 10		10

HEX CAP SCREW



HEX CAP SCREWS BLACK GR5 UNC		
SIZE	LBS/ CTN	PCS/ CTN
1-1/8"-7 x 3		50
1-1/8"-7 x 3-1/2		40
1-1/8"-7 x 4		40
1-1/8"-7 x 4-1/2		36
1-1/8"-7 x 5		36
1-1/8"-7 x 5-1/2		35
1-1/8"-7 x 6		30
1-1/8"-7 x 6-1/2		25
1-1/4"-7 x 4		30
1-1/4"-7 x 4-1/2		30
1-1/4"-7 x 5		25
1-1/4"-7 x 5-1/2		25
1-1/4"-7 x 6		25
1-1/4"-7 x 6-1/2		20



HEX CAP SCREWS ZP GR5 UNC		
SIZE	LBS/ CTN	PCS/ CTN
1/4-20 x 1/2		4000
1/4-20 x 3/4		3000
1/4-20 x 1		2500
1/4-20 x 1-1/4		2400
1/4-20 x 1-1/2		2000
1/4-20 x 1-3/4		1700
1/4-20 x 2		1500
1/4-20 x 2-1/4		1500
1/4-20 x 2-1/2		1200
1/4-20 x 3		1000
1/4-20 x 3-1/2		850
1/4-20 x 4		750
1/4-20 x 4-1/2		650
1/4-20 x 5		600
1/4-20 x 5-1/2		500
1/4-20 x 6		480
5/16-18 x 1/2		2500
5/16-18 x 3/4		2300
5/16-18 x 1		2000
5/16-18 x 1-1/4		1500
5/16-18 x 1-1/2		1400
5/16-18 x 1-3/4		1100
5/16-18 x 2		1000
5/16-18 x 2-1/4		900
5/16-18 x 2-1/2		900
5/16-18 x 2-3/4		750

SIZE	LBS/ CTN	PCS/ CTN
5/16-18 x 3		700
5/16-18 x 3-1/2		550
5/16-18 x 4		450
5/16-18 x 4-1/2		400
5/16-18 x 5		400
5/16-18 x 5-1/2		350
5/16-18 x 6		320
3/8-16 x 3/4		1500
3/8-16 x 1		1200
3/8-16 x 1-1/4		1000
3/8-16 x 1-1/2		800
3/8-16 x 1-3/4		700
3/8-16 x 2		600
3/8-16 x 2-1/4		550
3/8-16 x 2-1/2		500
3/8-16 x 2-3/4		500
3/8-16 x 3		400
3/8-16 x 3-1/2		350
3/8-16 x 4		300
3/8-16 x 4-1/2		300
3/8-16 x 5		250
3/8-16 x 5-1/2		240
3/8-16 x 6		250
7/16-14 x 3/4		1000
7/16-14 x 1		850
7/16-14 x 1-1/4		800
7/16-14 x 1-1/2		650
7/16-14 x 1-3/4		550
7/16-14 x 2		500
7/16-14 x 2-1/2		400
7/16-14 x 3		340
7/16-14 x 3-1/2		300
7/16-14 x 4		260
7/16-14 x 4-1/2		230
7/16-14 x 5		210
7/16-14 x 5-1/2		180
7/16-14 x 6		180
1/2-13 x 3/4		600
1/2-13 x 1		600
1/2-13 x 1-1/4		500
1/2-13 x 1-1/2		500
1/2-13 x 1-3/4		400
1/2-13 x 2		400
1/2-13 x 2-1/4		350
1/2-13 x 2-1/2		300
1/2-13 x 2-3/4		260
1/2-13 x 3		250
1/2-13 x 3-1/2		210
1/2-13 x 4		180
1/2-13 x 4-1/2		160
1/2-13 x 5		150
1/2-13 x 5-1/2		140
1/2-13 x 6		130
1/2-13 x 6-1/2		120
1/2-13 x 7		100
1/2-13 x 7-1/2		110
1/2-13 x 8		110
1/2-13 x 9		90
1/2-13 x 10		90
9/16-12 x 1		450
9/16-12 x 1-1/4		400
9/16-12 x 1-1/2		350
9/16-12 x 1-3/4		300
9/16-12 x 2		280
9/16-12 x 2 1/4		250
9/16-12 x 2-1/2		220
9/16-12 x 3		200
9/16-12 x 3-1/2		180
9/16-12 x 4		160
9/16-12 x 4-1/2		150
9/16-12 x 5		120
9/16-12 x 5-1/2		120
9/16-12 x 6		110
5/8-11 x 1		350
5/8-11 x 1-1/2		300
5/8-11 x 1-3/4		280
5/8-11 x 2		250
5/8-11 x 2-1/4		220
5/8-11 x 2-1/2		220

SIZE	LBS/ CTN	PCS/ CTN
5/8-11 x 3		180
5/8-11 x 3-1/2		160
5/8-11 x 4		150
5/8-11 x 4-1/2		130
5/8-11 x 5		120
5/8-11 x 6		110
5/8-11 x 6		110
5/8-11 x 7		90
5/8-11 x 8		65
5/8-11 x 9		55
5/8-11 x 10		55
3/4-10 x 1-1/2		170
3/4-10 x 2		140
3/4-10 x 2-1/2		120
3/4-10 x 3		110
3/4-10 x 3-1/2		100
3/4-10 x 4		100
3/4-10 x 4-1/2		90
3/4-10 x 5		80
3/4-10 x 5-1/2		70
3/4-10 x 6		70
3/4-10 x 6-1/2		60
3/4-10 x 7		60
3/4-10 x 7-1/2		50
3/4-10 x 8		50
3/4-10 x 8-1/2		40
3/4-10 x 10		38
3/4-10 x 12		32
7/8-9 x 1-1/2		120
7/8-9 x 1-3/4		110
7/8-9 x 2		100
7/8-9 x 2-1/2		80
7/8-9 x 3		70
7/8-9 x 3-1/2		70
7/8-9 x 4		70
7/8-9 x 4-1/2		55
7/8-9 x 5		50
7/8-9 x 5-1/2		45
7/8-9 x 6		40
7/8-9 x 6-1/2		40
7/8-9 x 7		35
7/8-9 x 7-1/2		35
7/8-9 x 8		30
7/8-9 x 9		30
1"-8 x 2		75
1"-8 x 2-1/2		60
1"-8 x 3		70
1"-8 x 3-1/2		50
1"-8 x 4		50
1"-8 x 4-1/2		45
1"-8 x 5		40
1"-8 x 5-1/2		40
1"-8 x 6		40
1"-8 x 7		25
1"-8 x 8		25
1"-8 x 8-1/2		20
1"-8 x 9		20
1"-8 x 10		20

CARRIAGE BOLT



CARRIAGE BOLT ZP GR2		
SIZE	LB/ CTN	QCS/ CTN
1/4-20 X 3/4		3200
1/4-20 X 1		2800
1/4-20 X 1 1/4		2500
1/4-20 X 1 1/2		2200
1/4-20 X 1 3/4		1800
1/4-20 X 2		1800
1/4-20 X 2 1/4		1600
1/4-20 X 2 1/2		1600
1/4-20 X 3		1200
1/4-20 X 3 1/2		1200
1/4-20 X 4		1000
1/4-20 X 4 1/2		1000
1/4-20 X 5		800
1/4-20 X 5 1/2		800
1/4-20 X 6		600
1/4-20 X 7		600
5/16-18 X 1		1600
5/16-18 X 1-1/4		1500
5/16-18 X 1 1/2		1200
5/16-18 X 1 3/4		1200
5/16-18 X 2		1000
5/16-18 X 2 1/4		1000
5/16-18 X 2 1/2		800
5/16-18 X 3		800
5/16-18 X 3 1/2		750
5/16-18 X 4		600
5/16-18 X 4 1/2		600
5/16-18 X 5		500
5/16-18 X 5 1/2		500
5/16-18 X 6		400
3/8-16 X 3/4		1500
3/8-16 X 1		1000
3/8-16 X 1 1/4		1000
3/8-16 X 1 1/2		800
3/8-16 X 2		750
3/8-16 X 2 1/2		600
3/8-16 X 3		500
3/8-16 X 3 1/2		500
3/8-16 X 4		450
3/8-16 X 4 1/2		400
3/8-16 X 5		350
3/8-16 X 5 1/2		350
3/8-16 X 6		300
3/8-16 X 6 1/2		300
3/8-16 X 7		250
3/8-16 X 8		250
3/8-16 X 9		200
3/8-16 X 10		200
3/8-16 X 12		100
1/2-13 X 1		500
1/2-13 X 1 1/2		450
1/2-13 X 2		350
1/2-13 X 2 1/2		300
1/2-13 X 3		250
1/2-13 X 3 1/2		250
1/2-13 X 4		200
1/2-13 X 4 1/2		200
1/2-13 X 5		200
1/2-13 X 5 1/2		150
1/2-13 X 6		150
1/2-13 X 7		150
1/2-13 X 8		100
1/2-13 X 9		100
1/2-13 X 10		100
1/2-13 X 12		80
5/8-11 X 4		100



FINISHED HEX NUTS ZP		
SIZE	LB/ CTN	QCS/ CTN
1/4" - 20		8800
5/16" - 18		5500
3/8" - 16		3800
7/16" - 14		2000
1/2" - 13		1600
5/8" - 11		720
3/4" - 10		430
7/8" - 9		250
1" - 8		200



NYLON INSERT LOCK NUTS ZP		
SIZE	LB/ CTN	QCS/ CTN
1/4"-20		6500
5/16"-18		4500
3/8"-16		3000
1/2"-13		1200
5/8"-11		600
3/4"-10		450



USS FLAT WASHERS ZP		
SIZE		QCS/ CTN
1/4"		50LBS
5/16"		50LBS
3/8"		50LBS
7/16"		50LBS
1/2"		50LBS
5/8"		50LBS
3/4"		50LBS
7/8"		50LBS
1"		50LBS



SPLIT LOCK WASHER ZP		
SIZE		QCS/ CTN
1/4"		50LBS
5/16"		50LBS
3/8"		50LBS
7/16"		50LBS
1/2"		50LBS
9/16"		50LBS
5/8"		50LBS
3/4"		50LBS




MAIN PRODUCTS

- DRYWALL SCREWS
- DECK SCREWS
- SELF DRILLING SCREWS-NEO WASHERS
- WOOD WORKING SCREWS
- CEMENT SCREWS
- CONCRETE SCREWS



MANUFACTURING PLANT – TIMBER SCREW – LONG SCREW UP TO 900MM LONG

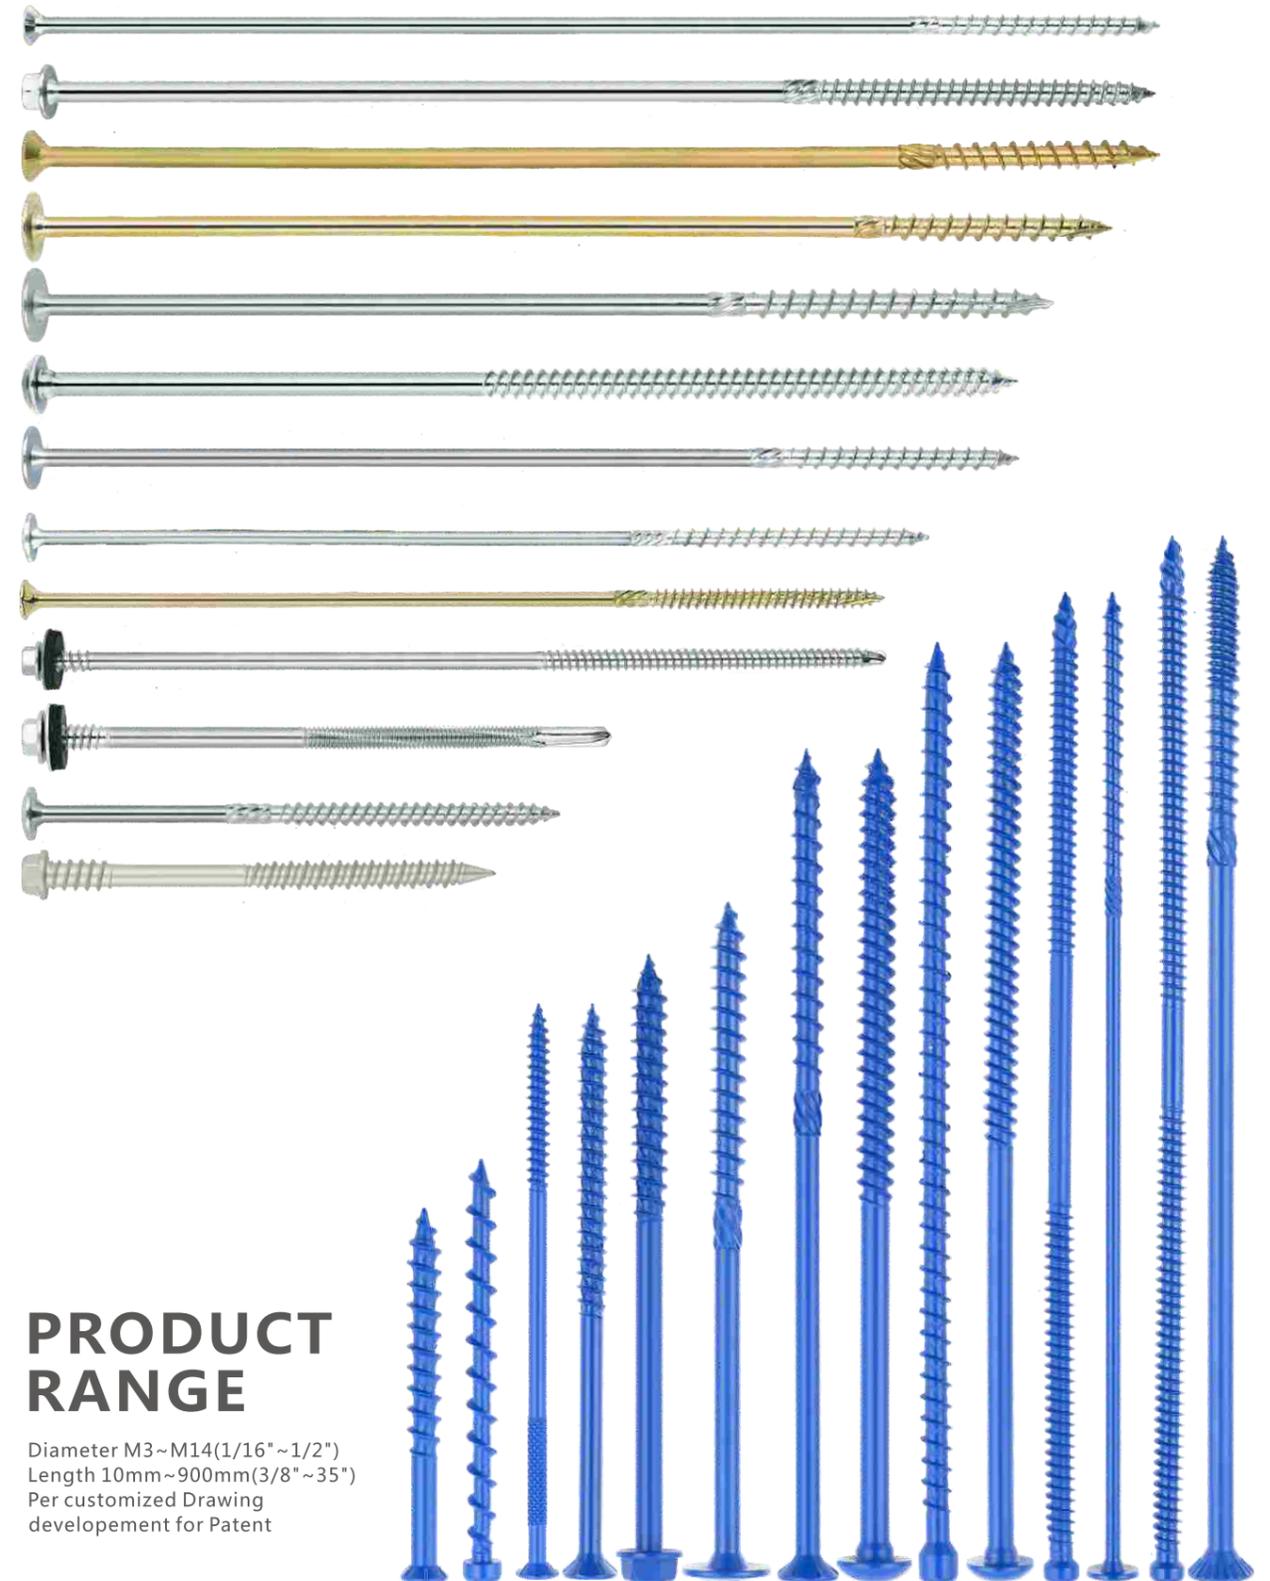

PRODUCT RANGE

Diameter M3~M14(1/16"~1/2")
Length 10mm~900mm(3/8"~35")
Per customized Drawing
development for Patent



HEX WASHER DRILLING
SCREWS SILVER RUSPERT



SLOTTED HEX WASHER
SHEET METAL SCREWS



PHILLIPS HEAD
SCREWS RUSPERT COATED



TORX RECESS
SCREWS RUSPERT COATED



SQUARE DR.FLAT DECK
SCREWS RUSPERT COATED



DRYWALL SCREWS
COARSE/TWINFAST THREAD



HEX WASHER HEAD
TYPE A+TYPE AB+TYPE 17



HEX FLANGE HEAD
WINGED SELF DRILLING SCREWS



HEX WASHER HEAD
WINGED WITH BONDED WASHERS
SELF DRILLING SCREWS



HEX WASHER HEAD
HIGH LOW THREAD+TYPE 17



STAINLESS CAP SCREWS



SELF DRILLING
SCREWS HEX WASHER HEAD



EX001



EX002



EX003



EX004



EX005



EX006



EX007



EX008



EX009



EX010



EX011



EX012



EX013



EX014



EX015



EX016



EX017



EX018



EX019



EX020



EX021



EX022



EX023



EX024



EX025



EX026



EX027



EX028



EX029



EX030



EX031



EX032



EX033



EX034



EX035



EX036



EX037



EX038



EX039



EX040



EX041



EX042



EX043



EX044



EX045



EX046



EX047



PEX048



EX049



EX050



EX051



EX052



EX053



EX054



EX055



EX056



EX057



EX058



EX059



EX060



EX061



EX062



EX063



EX064



EX065



EX066



EX067



EX068



EX069



EX070



EX071



EX072



EX073

EX074

EX075

EX076



EX077

EX078

EX079

EX080



EX081

EX082

EX083

EX084



EX085

EX086

EX087

EX088



EX089

EX090

EX091

EX092



EX093

EX094

EX095

EX096

MAIN PRODUCTS STAINLESS STEEL SCREWS

• 302HQ , 304M , 305JI , 316C , T410 , T430 , SOLID BRASS



EX097

EX098

EX099

EX100



EX101

EX102

EX103

EX104



EX105

EX106

EX107




PRODUCT EXAMPLE STAINLESS STEEL SCREWS

- HEX SOCKET HEAD CAP SCREWS
- HEX WASHER HEAD SCREWS
- SELF TAPPING SCREWS
- SECURITY SCREWS
- MACHINE SCREWS
- CHIPBOARD SCREWS
- THREAD FORMING
- WOOD SCREWS
- DECK SCREWS TYPE17



JOINT VENTURE FACTORY PROFILE YUANLI GROUP-QUZHOU TIANLI FASTENERS CO.,LTD.

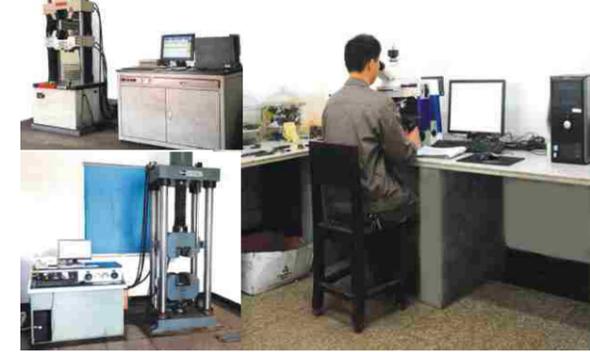

Factory Profile

Factory Area (sq meter):	150000
Total workers:	350
No. of QA/QC Personnel:	50
Number of production lines:	500
Number of supervisors:	30
Number of R&D engineers:	30

Product Range

Product type	Monthly Capacity
DIN/ASNI BOLTS	16000 Ton
THREADED RODS	2000 Ton

Quality Control

Certificates	ISO9001 ; ISO14000
Audit Record	HD Supply Factory Audit

Hexagon Bolts

Standard	DIN601, DIN933, DIN931, DZN912, DZN558, ANSI, JIS, BS
Diameter	M6-M56 1/4" -2"
Length	12mm--600mm 12" -20"
Propert Class	4.8, 5.8, 6.8, 8.8, 10.9, 12.9, 2Class, 5Class, 8Class

Hexagon socket head screws

Standard	DIN912, ISO4762
Diameter	M4-M36
Length	12mm-200mm
Propert Class	8.8, 10.9, 12.9

MAIN PRODUCTS

- HEX CAP BOLTS
- CARRIAGE BOLTS
- HEX LAG BOLTS
- U BOLTS
- ANCHOR BOLTS
- B7 STUD BOLTS
- HEX SOCKET CAP BOLTS
- CONCRETE BOLTS



The bolts include hex bolts, carriage bolts, hex socket bolts, flange bolts, flange bolts, square bolts, eye bolts, T-bolts, and more. The ranges of product grades are 4.8, 8.8, 10.9, and 12.9m and Gr2, Gr5, Gr8. Materials is available for carbon, stainless steel and aluminum. The diameter is from 2 to 48mm or 1/8 to 2 inches and the length is from 10 to 300mm or 3/8 to 10 inches. The standard is according to DIN, ANSI/ASME, BS, GB, and JIS and non-standard as customer's request. The wide range choice of finish, such as zinc plated (bright color or yellow color), hot dip galvanizing, chemical blackening, dacromet, plain and etc.

BOLT SERIES



THREADED ROD SERIES





MAIN PRODUCTS

- CONCRET SCREW
- DIN571 WOOD SCREW HEX HEAD
- CONCRETE SCREW FIAT HEAD TORX RECESS
- NAIL SCREW COUNTERSUNK HEAD PHILLIPS
- MACHINE SCREW PAN HEAD PHILLIPS
- MACHINE SCREW PAN HEAD SLOT
- O HOOK WOOD SCREW
- FURNITURE SCREW



SPECIAL PARTS



STAMPING PARTS



EXST001 EXST002 EXST003 EXST004 EXST005

EXST006 EXST007 EXST008 EXST009 EXST010

VARIOUS PACKAGE FOR DIY PRODUCTS



SMALL BOX FOR SCREWS



CUSTOMER AND MARKET



Sample Availability & Policy

Sample is available billed to the client. Lead time depends upon specifications and destination.

Guarantees/Warranties/Terms and Conditions

We replace defective goods within three months to a full year depending upon the details of the production agreement.

Export/import Processing Support

We can supply custom application and clearance service according to your requirements.

After Sales Service

We have an excellent team on our customer service hotline for pre and after sales services.

Any question, please feel free to contact us.



exact®